

***Installation And Cleaning Instructions***  
***KAWASAKI ELIMINATOR 125***  
***Model# 408 & S408***

Item	Qty.
8mm Mounting Spools	4
8 x 40mm Socket Head Bolts	2
8 x 45mm Socket Head Bolts	2
8 x 22 x 5mm Black Plastic Spacer	6
Silicone	1

***Saddlebag Installation***

- 1.) Refer to Figure 1.
- 2.) Remove and discard rear fender mounting bolts.
- 3.) Place a 8 x 45mm socket head bolt through an 8mm mounting spool and (two) 8 x 22 x 5mm black plastic spacer, into the front hole in the fender strut and tighten.
- 4.) Place a 8 x 40mm socket head bolt through an 8mm mounting spool and an 8 x 22 x 5mm black plastic spacer, into the rear hole in the fender strut and tighten.
- 5.) Repeat procedure on other side.
- 6.) Mount saddlebags over spools and secure with clips located inside of saddlebags. Check and tighten all bolts at this time.
- 7.) Bag will be easier to mount and remove if a small amount of silicone lubricant is applied to rubber mounting points.

## SADDLEBAG CARE INSTRUCTIONS

- Do not exceed 20 lbs. per saddlebag this includes sitting or standing on bags, it is a common occurrence for a non-rider to attempt to sit on bags, this also may void warranty.
- Periodically, apply a small amount of silicone lubrication to rubber mounting points. Saddlebags will be easier to mount and remove.
- Remove grease, oil or mud with mild detergent and water. For fast touch-up, *Windex* or *Turtle Wax F-21* will restore original luster. The use of any other chemicals may discolor the saddlebags.
- Whenever possible, release locks on saddlebag lids to allow the gaskets to expand during storage.
- If you use bags to ice down drinks, later remove bags, drain water and blot up excess water. The foam interior lining is closed-cell foam and does not retain water. Leave lids open until interiors are dry.
- Use white *Scotch Brite* scour pad (ultra-fine, only) to remove scratches & shiny spots and restore luster. This can be purchased at an automotive supply store.
- When locking or unlocking saddlebags, place one hand on top of bag near lock and apply a moderate amount of pressure while turning the key. This compresses the weather-seal enabling the locking mechanism to turn freely.
- Always inspect to verify each of the saddlebag mounting clips on inside of bag is properly installed when mounting bags. Clips fit into groove on mounting spool. Failure to perform this correctly can cause severe damage and may void warranty.


# KAWASAKI ELIMINATOR 125

## INSTALLATION INSTRUCTIONS

### Model# 408 & S408

Figure 1

← FRONT

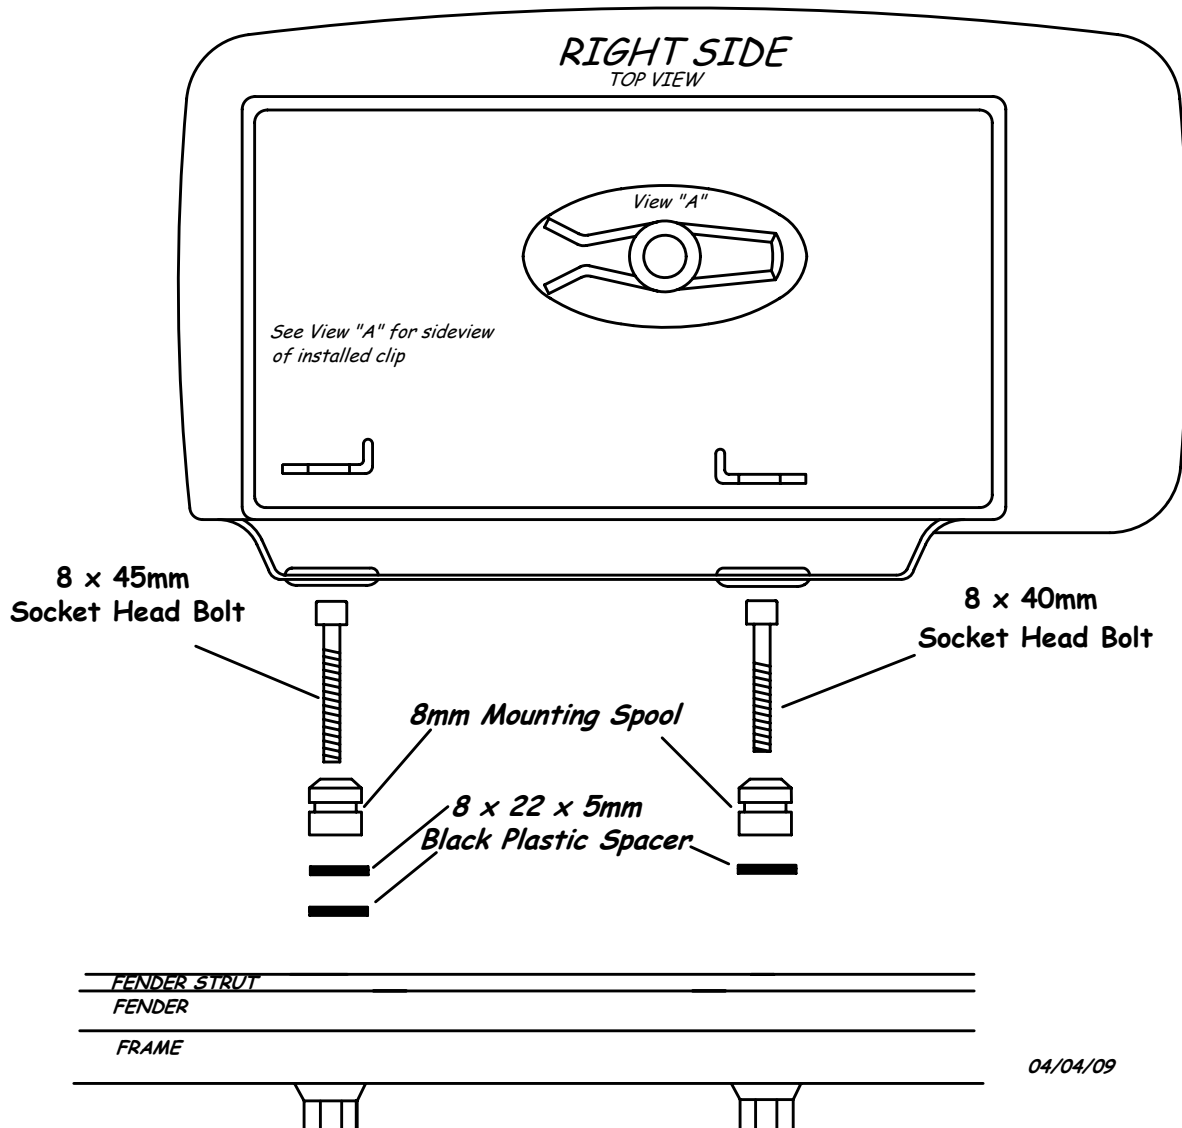

04/04/09