

Installation And Cleaning Instructions
Suzuki GZ250
Model#504
2000 to Present

Item	Qty
8 x 90mm Socket Head Bolt	4
8mm Mounting Spool	4
8 x 22 x 5mm Black Plastic Spacer	4
Silicone	1

Saddlebag Installation Instructions

Refer to figure 1 without a backrest, or figure 2 with a backrest.

1. Remove the two bolts securing fender strut to the fender. Replace with an 8 x 90mm Socket Head Bolt, and 8mm mounting spool. If you don't have a backrest add an 8 x 22 x 5mm black plastic spacer.
2. Repeat procedure on opposite side.

Information: Saddlebags will be easier to mount and remove if a small amount of silicone lubricant is applied to rubber mounting points.

3. Place saddlebags on mounting spools and secure with clips located inside of saddlebags.
4. Inspect each clip to verify that it is properly seated in retaining groove. See view A.

SADDLEBAG CARE INSTRUCTIONS

- Do not exceed 20 lbs. per saddlebag this includes sitting or standing on bags, it is a common occurrence for a non-rider to attempt to sit on bags, this also may void warranty.
- Periodically, apply a small amount of silicone lubrication to rubber mounting points. Saddlebags will be easier to mount and remove.
- Remove grease, oil or mud with mild detergent and water. For fast touch-up, *Windex* or *Turtle Wax F-21* will restore original luster. The use of any other chemicals may discolor the saddlebags.
- Whenever possible, release locks on saddlebag lids to allow the gaskets to expand during storage.
- If you use bags to ice down drinks, later remove bags, drain water and blot up excess water. The foam interior lining is closed-cell foam and does not retain water. Leave lids open until interiors are dry.
- Use white *Scotch Brite* scour pad (ultra-fine, only) to remove scratches & shiny spots and restore luster. This can be purchased at an automotive supply store.
- When locking or unlocking saddlebags, place one hand on top of bag near lock and apply a moderate amount of pressure while turning the key. This compresses the weather-seal enabling the locking mechanism to turn freely.
- Always inspect to verify each of the saddlebag mounting clips on inside of bag is properly installed when mounting bags. Clips fit into groove on mounting spool. Failure to perform this correctly can cause severe damage and may void warranty.


INSTALLATION INSTRUCTIONS

Suzuki GZ250 Model# 504

2000 to Present

Figure 1
Without Backrest

← FRONT

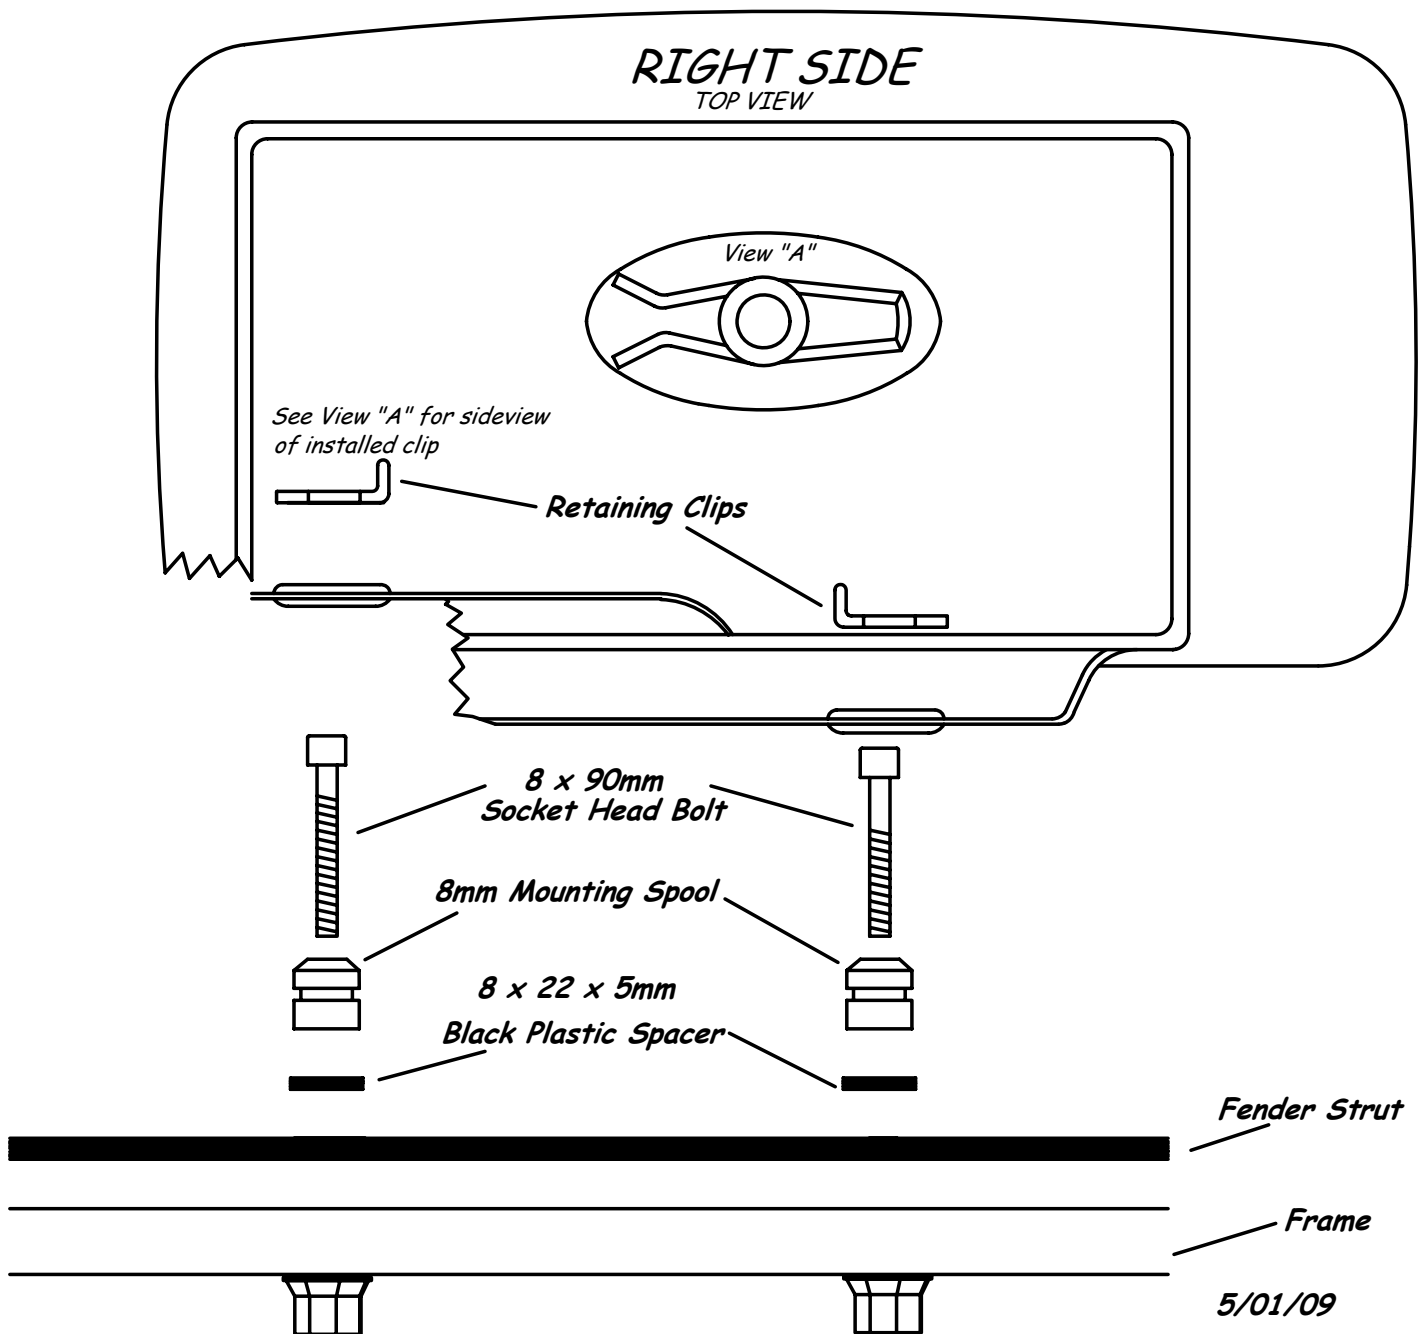

INSTALLATION INSTRUCTIONS

Suzuki GZ250 Model# 504

2000 to Present

Figure 2
With Backrest

← FRONT

